







BL293 BL294 BL295


USER MANUAL

LED SURFACE DOWNLIGHT

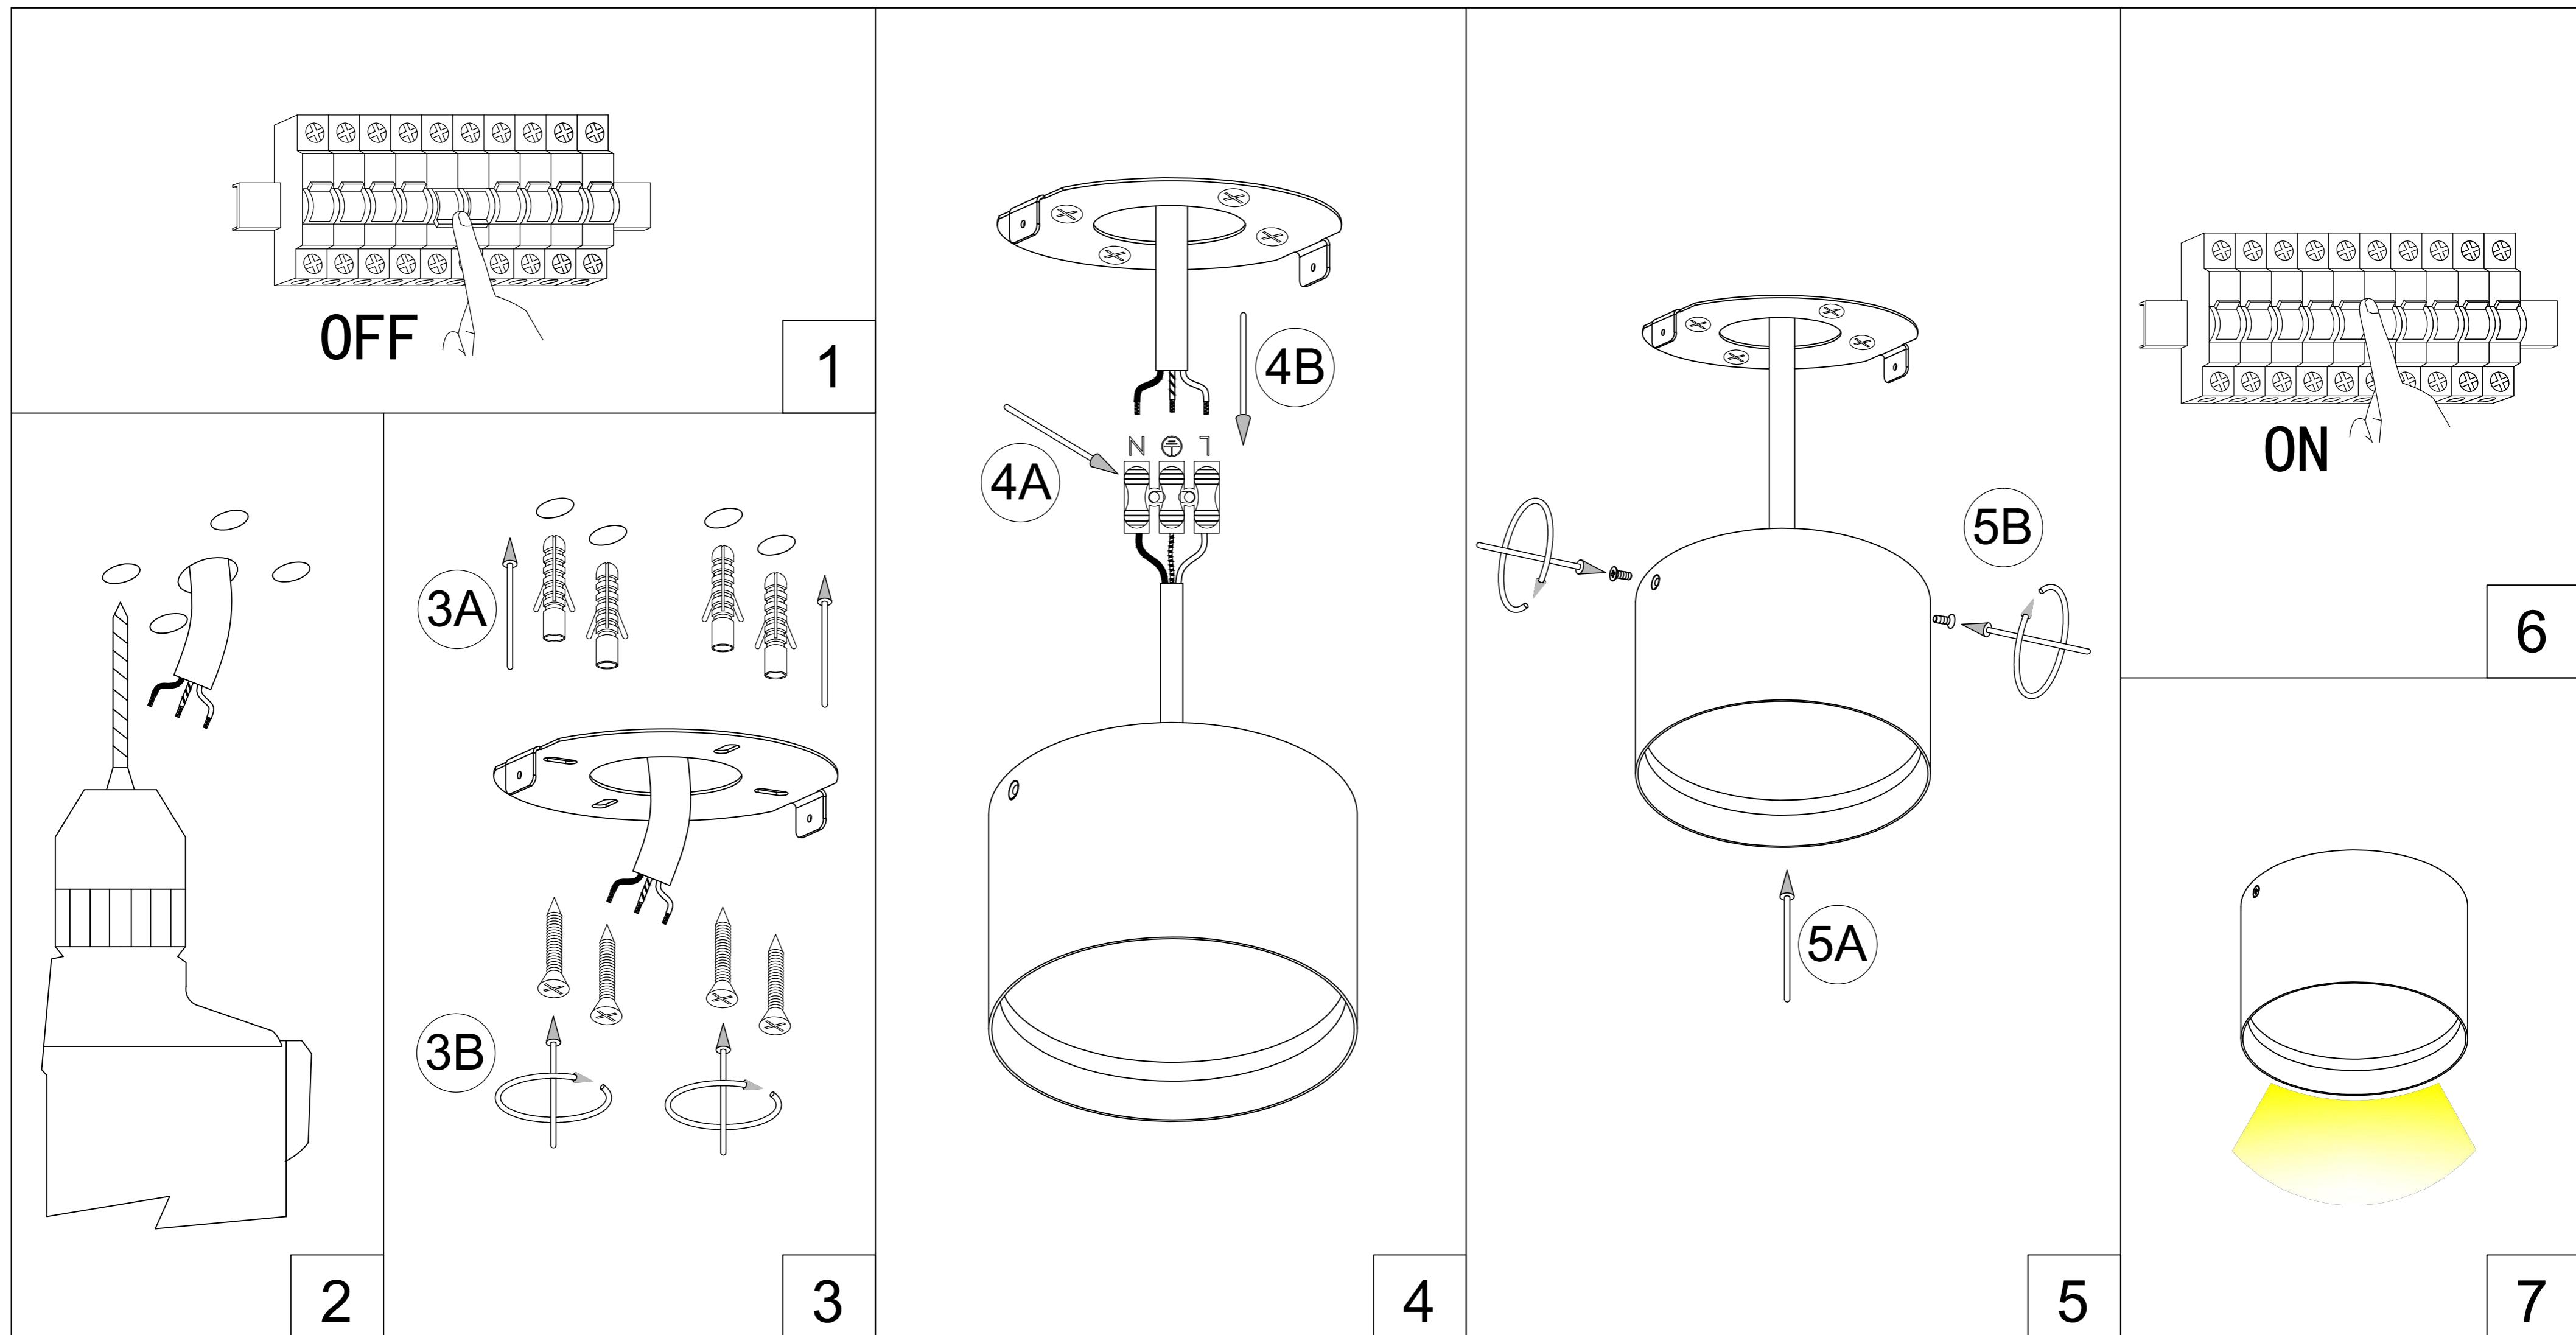


Accessories	Accessories	Accessories
expansion plug 2pcs	expansion plug 2pcs	
screw 2pcs	screw 2pcs	connector 3pcs

1. SWITCH OFF MAIN
2. MAKE HOLE PATTERN
3. INSTALL THE BASE PLATE
4. CONNECT LAMP TO THE MAIN
5. DRIVE IN THE SCREWS UNTILL TIGHT
6. SWITCH ON THE MAIN AND LIGHT ON

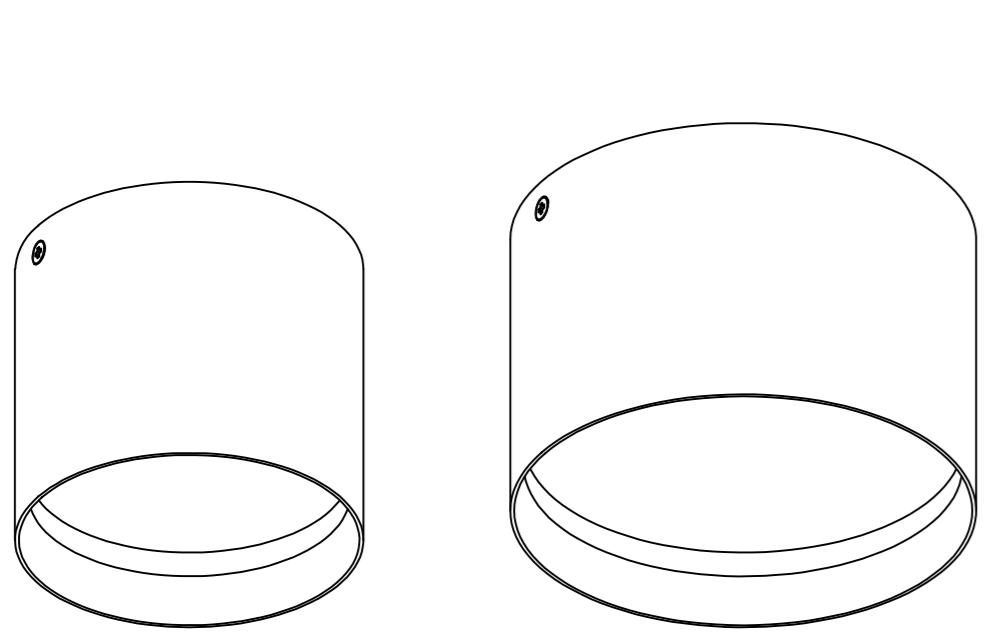

BL293
D89xH80(mm)
LED-6W

BL294
D119xH80(mm)
LED-12W

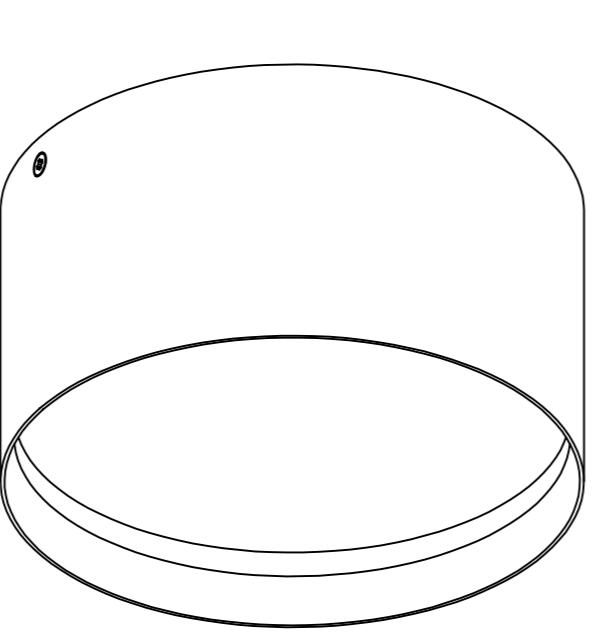

BL295
D149xH80(mm)
LED-20W

Lamp: SMD-2835 LED
 Color: 2700K/3000K/4000K/6000K
 Color rendering: Ra97
 Input: 220V-240V AC
 Current: Constant 300mA
 Frequency: 50/60Hz
 Watt: 6W/12W/20W
 Life span: 20,000hrs
 Operating temp: -20°C - +40°C
 Indoor use only
 IP20
 Dimmable: NO

Cautions: a. Installed by qualified electrician
 b. Use only power-supply supplied
 by manufacturer for products guarantee